

Sagita

USER'S MANUAL

SAFETY TIPS



- Never place the Fezz Audio Sagita preamplifier near heat sources, such as radiators, heaters or direct sunlight. Ensure adequate ventilation and airflow
- We also warn against exposure of the preamplifier to conditions such as very low temperatures and/or high humidity.
- The preamplifier should be plugged directly into a wall socket. If you must use an extension cord, please make sure that it has load parameters sufficient to ensure proper handling of current delivery to the device.
- When cleaning, always disconnect the Sagita from the power source. Use a dry, soft cloth. Do not use water or cleaning agents.
- If your preamplifier starts to misbehave or to work incorrectly, if it's temperature gets too high or you start feeling smoke - immediately disconnect the device from the mains.
- Due to the risk of exposure to high voltages – please do not open the lid of the amplifier. ATTENTION: This warning remains in force also in a situation where the device is already disconnected from the wall outlet.
- Always replace fuses in accordance with the original, intended specification.
- Do not make repairs on your own, or adjustments beyond those as described in this manual. Execution of any unauthorized repairs or modifications of the device result in a loss of warranty.

TABLE OF CONTENTS

SAFETY TIPS	2
INSTALLATION OF THE DEVICE	4
Unpacking	4
Contents of the package	4
Where to place the preamplifier	4
Description of elements of the preamplifier	5
INTERCONNECTIONS	6
FIRST POWER-UP AND GETTING STARTED	7
OPTIONAL EQUIPMENT	7
Remote control	7
TROUBLE-SHOOTING GUIDE	8
TECHNICAL DATA	8
DECLARATION OF CE CONFORMITY	9

INSTALLATION OF THE DEVICE

UNPACKING

Please kindly check if the packaging of the Sagita preamplifier has not been damaged during transit. If you find any damages, please immediately contact your dealer. Remove the preamplifier and accessories from the packaging. Make sure that the content is not damaged.



Please do not dispose of the original packaging, so as to facilitate possible shipment of the device in the future.

CONTENTS OF THE PACKAGE

The package should contains:


- Fezz Audio preamplifier
- power cord
- user's manual
- optional: remote control,

If any of the above items are missing in your package, contact your dealer immediately.

WHERE TO PLACE YOUR PREAMPLIFIER

Always provide adequate ventilation for your Sagita preamplifier. Cool operation ensures the longest possible operating life for any electronic equipment. Do not install the Sagita preamplifier directly above a heat generating component such as a high powered amplifier.

DESCRIPTION OF ELEMENTS OF THE PREAMPLIFIER

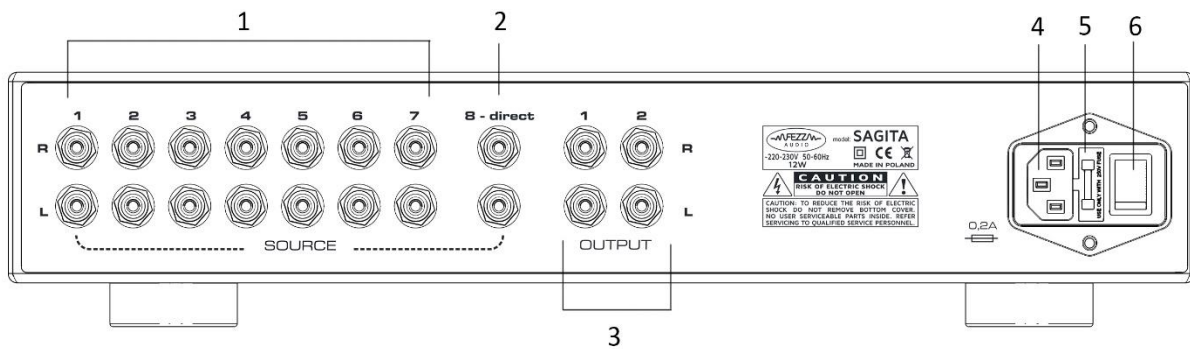


- 1) RCA line inputs
- 2) RCA direct input
- 3) RCA line outputs
- 4) IEC power supply cord socket
- 5) Main fuse socket
- 6) Mains switch



- 7) Volume potentiometer
- 8) Output selector
- 9) Power button / Source selector
- 10) Power indicator light

CONNECTIONS

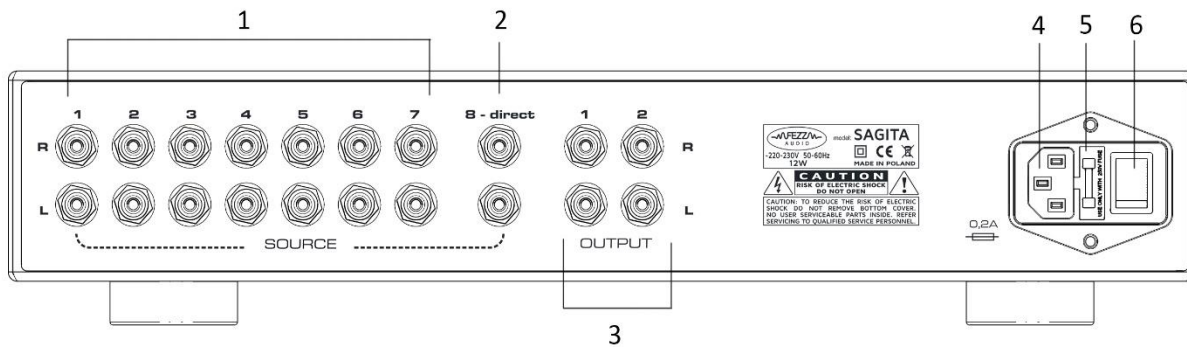

The figures above shows the front and rear panel views of the Fezz Audio Sagita preamplifier, together with the description of the inputs and outputs allowing for connection of the other elements of your audio system.

Follow the instructions below to connect Your sound system correctly.

STEP 1 / CONNECT THE PREAMPLIFIER TO THE POWER AMPLIFIER

Sagita preamplifier has two pairs of power amplifier outputs (3). Please connect the power amplifier to the one pair of the RCA outputs (3). If you are using two MONO power amplifiers, please connect one to the L output, second to the R output. Select the source of output signal by rotating the output selector (8) located on the front panel of the preamplifier.

The quality of the connecting cable is important. Please pay attention to the output cable quality as it can have an impact on the performance qualities of the sound.

STEP 2 / CONNECT THE ANALOG SOURCES

Connect the signal sources to the preamplifier inputs (1) Select the source of input signal by rotating the input selector located on the front panel of the preamplifier (9). In order to achieve the highest sound quality, use only high-quality RCA cables. Pay attention to the proper connection and distinction of the right (R) and the left (L) channels.

DIRECT INPUT – You can connect analog signal source (2) and bypass the Sagita`s preamplifier volume potentiometer. You can control the volume using variable output in your player.

STEP 3 / CONNECT THE POWER SUPPLY CORD

Make sure that the preamplifier is switched off. Connect the power cord to the IEC socket on the rear panel of the preamplifier.



The preamplifier is designed to operate at a rated voltage of 230V / 50Hz. Connecting the device to a mains network with incorrect parameters can lead to damage that is not covered by manufacturers warranty.

FIRST POWER-UP AND GETTING STARTED _____

Make sure that all of your wiring is connected in accordance with the information as provided above on page 6 of this manual.

Set the volume control to minimum. Turn on the mains power at the back of the Sagita preamplifier. (6) After this time the light will turn red. Push power / selector source button to turn-ON the preamplifier. Select output 1 or 2. Make sure the sound source is turned on, select source number, then gradually increase the volume level by turning the potentiometer.

OPTIONAL EQUIPMENT _____

REMOTE CONTROL

The IR remote control enables adjustment of the volume level, selecting sources and power ON/OFF the preamplifier.



TROUBLE-SHOOTING GUIDE

If your amplifier does not work as it is supposed to, it is fairly easy to diagnose and remedy some of the common malfunctions, by following procedures as outlined in this following.

THE PROBLEM	PROBABLE REASON	THE SOLUTION
After turning the power switch to the ON position, the amplifier does not switch on.	A blown fuse	Please exchange to faulty fuse to a new one (0,2 T), within the fuse holder as depicted with index 5 on page 5 of this user's manual.
	An improper connection of the mains cable	Please check if the plugs of the mains cable are properly inserted into the electrical mains socket and to the socket as depicted with index 5 on page 5 of this user's manual.

If You have verified the aforementioned situations, and your problem still persists, please contact Your local Fezz Audio dealer.

TECHNICAL DATA

Type: Stereo preamplifier

Model: Sagita

Inputs : 8xRCA

Outputs: 2x RCA

Power consumption: 12W

AC fuse: 0,2A

Net Weight: 6kg

Dimensions (width x depth x height): 420x410x175mm

Colour schemes: black, white, burgundy, red

Optional equipment as a remote control,



Declaration of Conformity

Manufacturer: **Toroidy.pl Transformatory L. Lachowski Sp.k.** (owner of Fezz Audio brand)

Address: **ul. Mazowiecka 20**
16-001 Księżyno
POLAND

I declare that the product:

Brand: **Fezz Audio**

Model: **Sagita Pre-amplifier**

complies with the following European Union Council Directives and Standards relating to electromagnetic compatibility (**EMC Directive 2014/30/EU**) and the low voltage Directive (**2014/35/EU**).

This declaration of conformity is the result of an examination carried out in accordance with European Standards for **EN 60065:2002+A2:2010+A12:2011+A11:2008** for low voltage, as laid down in article 10 of the EMC Directive.



Księżyno 4.01.2021

Lech Lachowski