


ARENA S15




.Sf.

Frequency Response

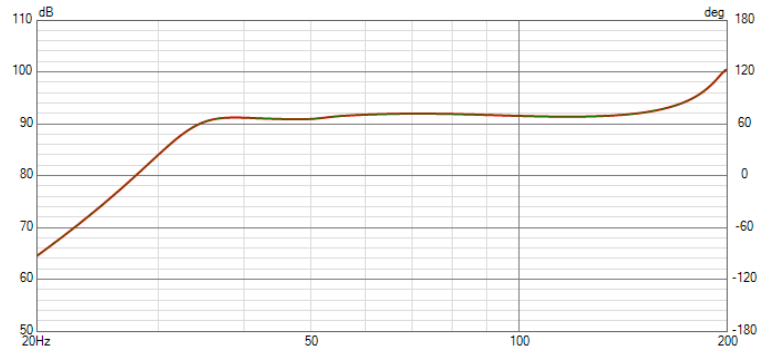

Impedance Amplitude and Phase

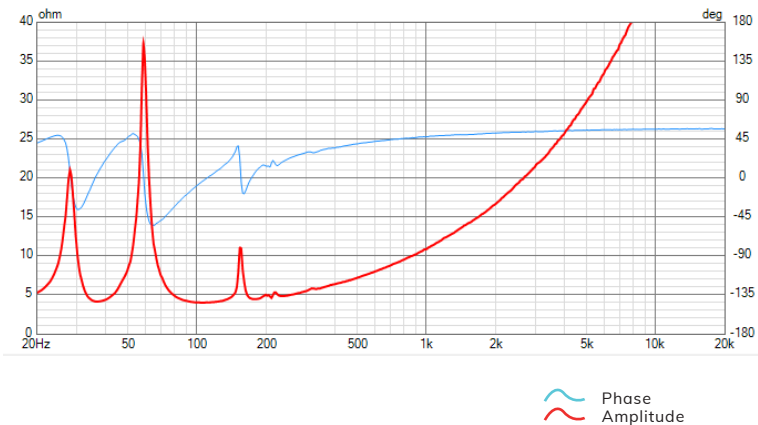

Technical Specifications

Speaker type	Array Balanced Sub-Woofer
Low frequency transducer	4 x 6,5 in
Mid/High frequency transducer	-
Maximum recommended power	400 W
Frequency response (-6dB on-axis)	29 Hz - 180 Hz
Frequency Response (-3dB on-axis)	31,5 Hz - 180 Hz
Max SPL 1 Meter	117 dB
Sensitivity 2.83 Vrms@1m	91 dB
Nominal Impedance	4 Ω
Minimal impedance	3,5 Ω
Enclosure type	Patented Acoustical Load
Mounting Depth	202 mm - 7,9 in
Weight	38,7 kg - 85,3 lb
Depth	208 mm - 8,1 in
Width	432 mm - 17 in
Height	947 mm - 37,2 in

