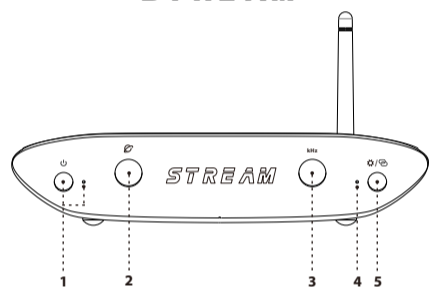# ifi
ZEN
STREAM

STREAM

1   2   3   4 5

Thank you for purchasing the Stream from ZEN series. The Stream is a Wi-Fi Audio Transport.

1. Power switch and indicator (⏻)

2. Network Status LED ( )
The LED color scheme indicates the signal strength and network status received by ZEN Stream from the router.

	LED	**Speed**
Internet	White	Fast
	Cyan	Slow
Local network	Green	Fast
(no Internet)	Yellow	Slow
No connection	Red	_

3. Audio Format LED (kHz)
The LED colour scheme indicates the audio format and sampling frequency received by ZEN Stream from the music source.

LED	**Mode**
Green	PCM 44.1/48/88.2/96kHz
Yellow	PCM 176.4/192/352.8/384kHz
Cyan	DSD 64/128
Blue	DSD 256
OFF	No Streaming

4. LED for Hotspot Status
LED	**Status**
Flashing	On and awaiting connection
ON	Hotspot Connected
OFF	Hotspot off

60 seconds auto OFF if no activation.

5. LED/HOTSPOT switch (/)
- LED ON/OFF (short press)
- Hotspot ON/OFF (long press)

---

6 7   8   9   10   11   12 13
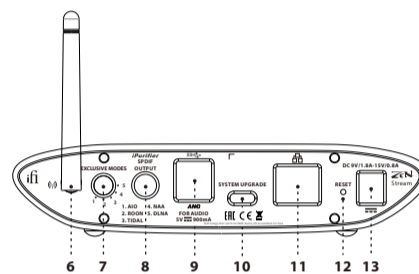
6. Antenna
Please attach the enclosed antenna for maximum reception quality.

7. System (Mode) selector
The following 5 play modes can be selected:
1) All In One. Use for set up
2) Roon only
3) TIDAL only
4) NAA (Network Audio Adapter) only
5) DLNA only

8. SPDIF (Coaxial) output
This is a coaxial output with iPurifier technology built-in.

9. USB Type A x 2
Compatible with USB 2.0 and USB 3.0.

a) Input- Connect to DAC
b) Output- Connect to HDD, USB DISK etc

These two USB ports have ANC technology built- in.

10. System upgrade port
Used for system firmware upgrade.

11. Ethernet
For a Ethernet connection directly from a router.

12. Factory Reset
- Reset UI settings (short press)
- System reset (long press ≥3s)

13. DC power supply connection
DC 9V/1.8A-15V/0.8A DC power input. Please connect ZEN Stream to the enclosed power supply.

Tip: For all the various network connection methods, please visit our website.

Specifications
Input voltage:	DC 9V/1.8A-15V/0.8A, AC 100 -240V, 50/60Hz
Input:	WiFi/Ethernet/USB DISK, HDD etc.
Formats:	PCM384/DSD256
Output:	USB3.0/ Type-A Socket x2 and SPDIF (Coaxial)
Power consumption:	No Signal ~6W
	Max Signal ~10W
Dimensions:	158 x 100 x 35 mm
	6.2" x 3.9" x 1.4"
Net weight:	578 g (1.27 lbs)
Warranty period:	12 months

Specifications are subject to change without notice.